

LEVELTOP

Self Leveling Compound

Flat, smooth floors with every placement

Cement/Gypsum-based, self-leveling underlayment
designed to level and smooth interior concrete.
Designed for the fast leveling of floors.

LEVEL-TOP THICKnThin

Thin to thick application self levelling underlayment

LEVEL-TOP Plus

Advance self levelling underlayment

LEVELQUICK

Fast setting self leveling underlayment

LEVELFAST

Very fast setting self leveling underlayment

LEVEL-TOP SUPERHARD

SelfLeveling hard wear topping

LEVELCRETE

General purpose Self leveling underlayment

LEVELLITE

Light wt self leveling underlayment

LEVEL-TOP GYPFLO

Gypsum based self leveling underlayment

SUPERIOR PRODUCTIVITY AND QUICK RETURN TO SERVICE

- Superior workability – no troweling, sanding or grinding required.
- Installs from 1/8" to 2" neat.
- Can be extended to 5".
- Stone and tile installation in 4 hours; other floor coverings in 16-24 hours.

HIGH COMPRESSIVE STRENGTH: 5,000 PSI PERFORMANCE YOU CAN TRUST

- 10 year system warranty backed by the strength of Multichem Group




Approved Floor Coverings (over approved substrate)

Wooden Tiles



Carpet Tiles

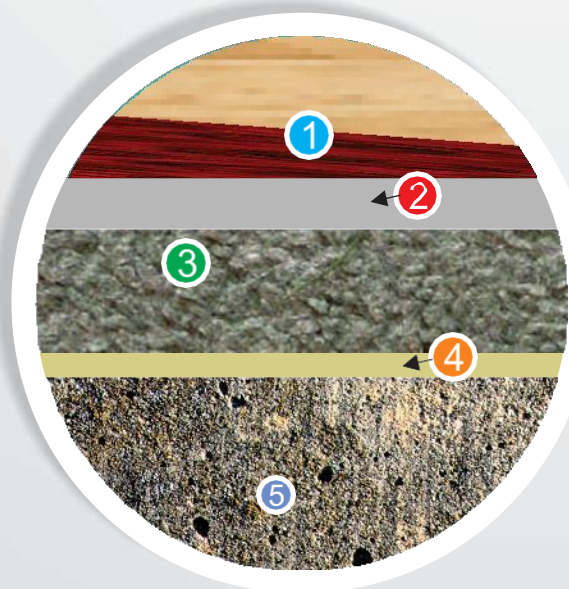

- ① Wooden / Carpet Tiles
- ② Adhesives
- ③ Level-Top Products
- ④ Level-Top Primer / Primer Plus
- ⑤ Properly Prepared Concrete Substrate

** When moisture mitigation is required, FluidGard must be used to qualify for a Multichem floor system warranty.*

Contact Multichem Technical Services for other approved Underlayments and Wear Toppings to provide the perfect base for decorative concrete and terrazzo finishes.



MULTICHEM INDUSTRIES PVT. LTD.

Address: 304, Exim Link, Mulund Goregaon link road, Nahur (W), Mumbai- 400078

Email : info@multichemgroup.net **Web :** www.level-top.com/ www.multichemgroup.net

Contact us: +91 9323890195/ 9619091025